

PLCS, LLC

Safe-T-L-Stopper - Elbow Removal Tool

Gas-free removal of 3/4"-1 1/4" elbow services operating up to 60 psi




- Removes troublesome elbow swing services within 30 minutes.
- Simple clamp-on assembly.
- No blowing gas, keeping workers safe.
- No need for expensive by-pass operations.
- Compact, only need a standard excavation.

Simple Operation


1. Drill through the backside of the elbow.
2. Insert rubber stopper into nipple or elbow to stop the flow of gas.
3. Abandon service.



Tool Assembled on Elbow

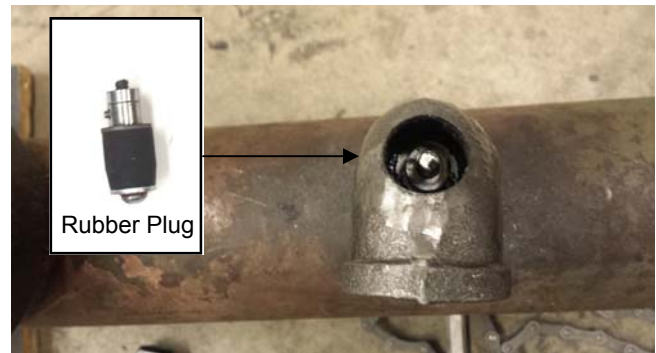

Top view: Hole drilled and rubber plug inserted to stop the flow of gas. Fittings can be removed to complete abandonment.

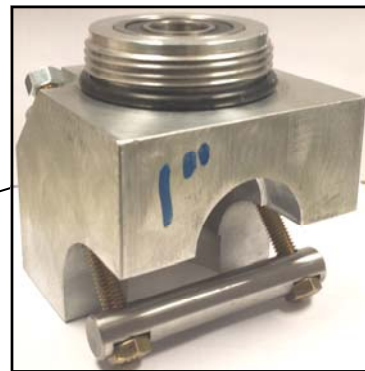

Clamp-on housing provides seal & rock steady base.

102 Gaither Drive, Unit 1, Mount Laurel, NJ 08054

phone: (856) 722-1333 • fax: (856) 273-9723 • e-mail: info@plcsusa.com • web: www.plcsusa.com