



Venturi Water Pump

A rugged, simple and lightweight air operated pump that requires no priming and is capable of moving close to 1,300 gallons of water per hour. The straight through design eliminates clogging and the unit cannot seize.

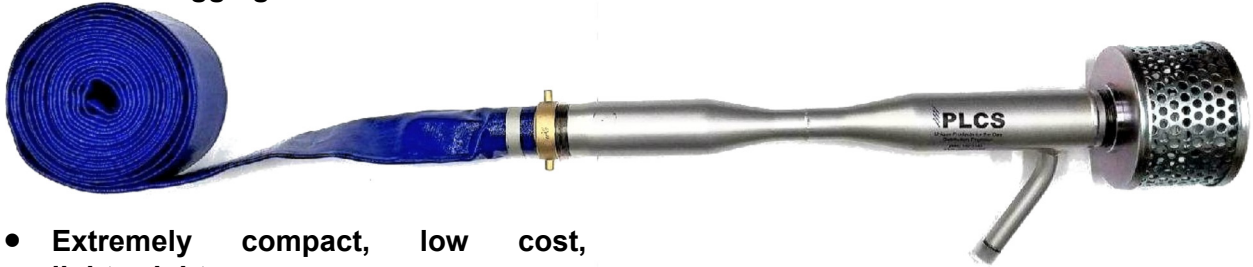

- Extremely compact, low cost, lightweight pump.
- Pumps slurry, mud, and small stones.
- Allows every crew to have a pump in the truck.
- Venturi type pump has no moving parts.
- Supplied with 20 ft. of lay flat discharge hose.
- Sufficient power to pump water 15 ft.
- Used by all types of US utilities and contractors.

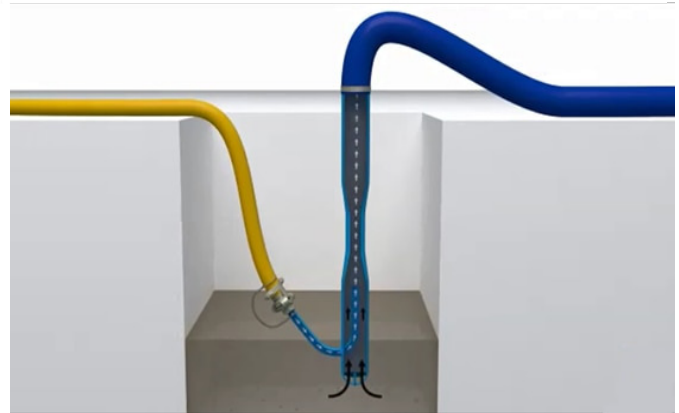

<u>Pump Specifications</u>		<u>PVC Lay-Flat Discharge Hose</u>	
Inlet / Outlet Connections:	2" MNPT	Diameter:	2"
Air Supply Connection:	1/2" MNPT	Length:	20' Long
Suction Strainer:	2" FNPT, 6" Dia., 3/8" openings	Weight:	5.8 lbs.
Pump Material:	Steel	Connection:	2" NPSH / NPT female fitting with pin lug brass swivel. On one end. Other end does not have a fitting.
Length:	24" Long	PD1 PVC blue discharge lay-flat hose that resists kinking and twisting. Designed as a standard duty hose for water discharge in industrial and construction applications. It is economical and rolls up flat for easy storage.	
Weight:	4.8 lbs.		

Requires a minimum of 80 cfm at 100 psi compressed air at the nozzle.

PLCS, LLC

102 Gaither Drive, Unit 1, Mount Laurel, NJ 08054

phone: (856) 722-1333 • fax: (856) 273-9723 • e-mail: info@plcsusa.com • web: www.plcsusa.com

Venturi Water Pump - Parts List

Part #	Description
69-EVWP2-H	<p data-bbox="539 415 1453 493">Venturi Water Pump c/w 20' Hose, NPT Brass Coupler & Strainer</p> 
69-EVWP2	<p data-bbox="539 745 1453 787">Venturi Water Pump ONLY</p> 
69-EVWP2-DH	<p data-bbox="539 1039 1453 1081">Discharge Hose 20' includes Brass Coupling</p> 
69-EVWP2-S	<p data-bbox="539 1312 1453 1354">6" Diameter X 2" NPT Water Strainer (3/8" holes)</p> 